

Product Data Sheet: U-Anchor 2600 Coatings™

Provides a positive attachment of the U-Anchor 2600 Coatings for commercial roof types with coated surfaces

Product Description:

The **U-Anchor 2600 Coatings** is a lightweight rooftop attachment system consisting of a 5.5" U-Anchor Plate with a 3/8"-16 x 1-3/8" tall stainless steel stud. The assembly is attached to the roof using approved fasteners. The U-Anchor 2600 Coatings includes a U-Anchor Plate and a factory prepared reinforcement and is sealed using traditional three course methods.

The product with 1000 uses!

Advantages:

- * Lightweight: 5 oz. (142 grams)
- * Installs quickly, approximately rate of 12 per man hour.
- * Installs on any surface from flat to vertical.

Packaging:

U-Anchor 2600 Coatings is sold as a kit consisting of a U-Anchor Plate and Liquid Flashing Reinforcement.

Kits sold individually

Full box quantities: 10 kits

Kit components packaged separately

Additional Liquid Flashing Reinforcement can be purchased as needed

Attachment:

The U-Anchor 2600 Coatings is attached by fastening through the roofing assembly into the structural decking with approved fasteners. The peel and stick U-Anchor Liquid Flashing Liquid Reinforcement is adhered over the plate and to the roof surface. The material should be pressed evenly into position. Compatible Liquid applied coating should be applied sufficiently to fully cover the fabric and extend onto the roof surface on all sides.



Testing, Approvals and Listings:

The U-Anchor 2600 was tested in accordance with: ASCE 7-05 ASTM E330-02 (2010) TAS 117B. Test reports can be requested on-line or through your distributor.

Warranty:

10 year standard material warranty

Up to 20 year material warranty available

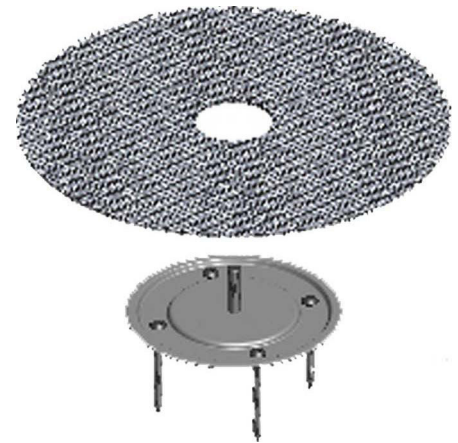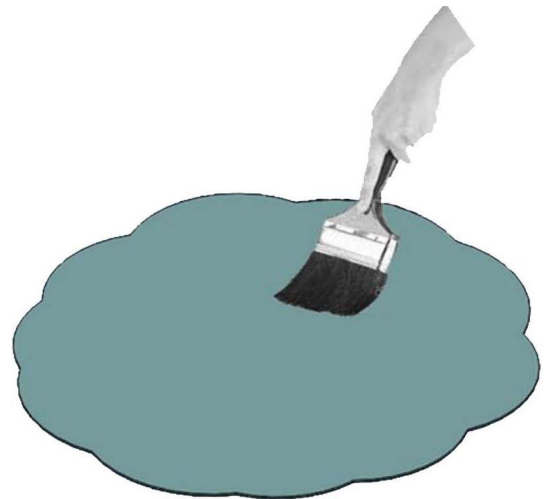

 Anchor Products™

P.O. Box 1551
Colleyville, TX 76034
Info@anchorp.com

888-575-2131
www.anchorp.com



Patent: Search "Plate"
at www.Vmarked.com