

Product Data Sheet: U-Anchor Liquid Flashing Reinforcement™

Reinforcement solution for use with the U-Anchor 2600 Coatings

Product Description:

The **U-Anchor Liquid Flashing Reinforcement** is a factory prepared peel and stick fabric faced, butyl rubber. The factory prepared material simplifies installation and reduces on-site labor. The Liquid Flashing Reinforcement is 11" diameter and includes a 1" center hole allowing the U-Anchor 2600 Coatings bolt to protrude through.

Advantages:

- * Lightweight: 3.5 oz (100 grams)
- * Installs in less than 1 minute
- * Provides an immediate, temporary watertight seal prior to proper application of a compatible roof coating

Packaging:

Included with the purchase of the U-Anchor 2600 Coatings

Units sold individually

Full box quantities: 10 units

Attachment:

The U-Anchor Liquid Flashing Reinforcement must be applied to a properly prepared dry surface.



Testing, Approvals and Listings:

The Liquid Flashing Reinforcement is commonly accepted by major roof coating manufacturers.

Warranty:

10 year standard material warranty

Up to 20 year material warranty available

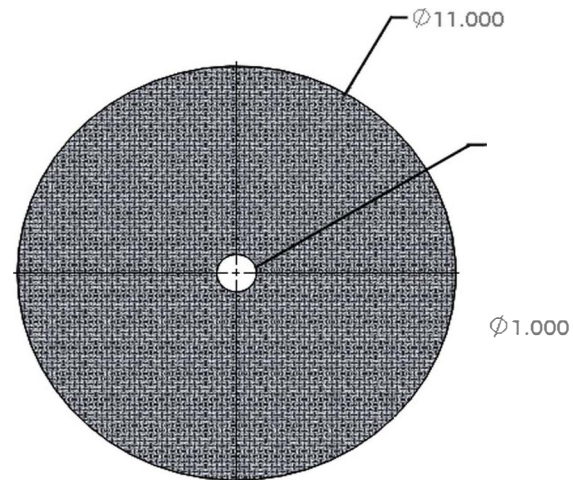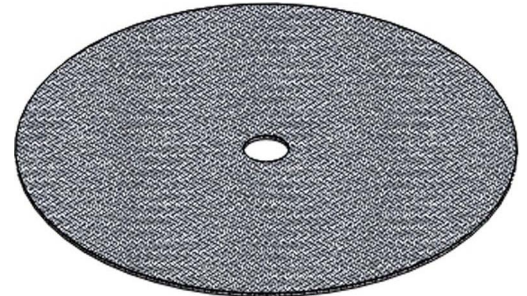

**ANCHOR
PRODUCTS™**



P.O. Box 1551
Colleyville, TX 76034
Info@anchorcorp.com

888-575-2131
www.anchorcorp.com



Patent: Search "Plate"
at www.Vmarked.com