


# U-ANCHOR™ | U2200-Plate

MECHANICALLY ATTACHED SOLUTION FOR ROOFING MANUFACTURER SPECIFIED FLASHING

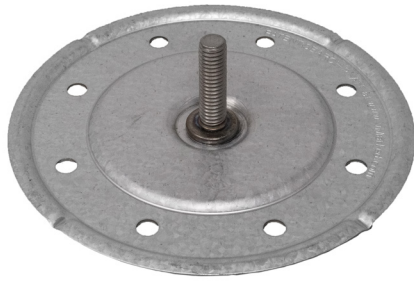

Front

Back



## Product Specs

### Bolt

- 3/8"-16 x 1.5" Bolt\*
- Material Type: 304 Stainless Steel

### Plate

- Outer Diameter: 5-1/2"
- Fastener Hole Diameter: 17/64" (8 holes)
- Fastener Hole Pattern: 4-1/8" Diameter
- Material Thickness: 0.047" (1.194mm)
- Material Type: Galvalume® AZ55

### Patents

- Visit [www.anchorp.com/patents](http://www.anchorp.com/patents)

## Packaging Specs

- Sold Individually OR Full Box Quantity
- Individual Weight: Approx. 0.3 lbs
- Full Box Quantity: 20 units
- Box Weight: Approx. 10 lbs
- Box Dimensions: 17" x 17" x 5"
- Full Pallet Quantity: 35 boxes
- Pallet Dimensions: 48" x 40" x 46"

\* Specified option is standard. Custom options may be available for additional charge. Lead times may apply depending on roofing manufacturer and product availability.

## Description

The U-Anchor 2200-Plate is a lightweight rooftop attachment consisting of a U-Anchor 2000 series plate. The U2200-Plate is made to be mechanically attached to the roofing system and flashed in using separate waterproofing method approved by the roofing manufacturer. This is ideal for built-up roofs and pour-able sealant kits.

## Advantages

- Lightweight: 4 oz. (113 grams)
- Installs in less than 5 minutes

## U-Anchor Attachment

The U2200-Plate is attached by fastening through the roofing assembly into the structural decking with 2-8 approved fasteners. The U2200-Plate is then flashed using the manufacturer's recommended method.

Fastener selection is dictated by the system assembly, deck type, and the project engineer. Refer to installation instructions and the specified roofing material manufacturer requirements before installing.

## Equipment Attachment

To securely mount your rooftop equipment to the U-Anchor, after its installed, the connection nut must be fastened to approximately 20-25 torque pounds.

Use a calibrated torque wrench during install to ensure appropriate results are achieved.

## Testing / Approvals

- Accepted - All Major Roofing Manufacturers
- LARR Listed

*Individual deck assembly reports available upon request.*

## Ratings

Results are base on plate performance only.

- Ultimate Load - Shear: 4000 lbs
- Ultimate Load - Tension: 3000 lbs

*Test was performed in accordance with:  
ICC -ES AC467 Section 3.2*

## Warranty

- Standard 20 Year Material Only Warranty

