


1000 Series

2000 Series

3000 Series

4000 Series

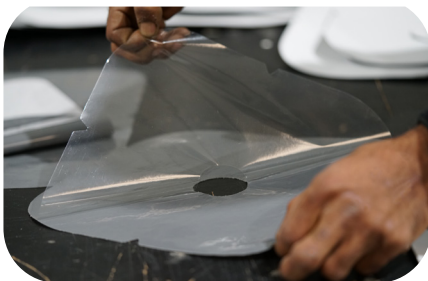

Back

Description

Butyl Backed Fabric is a pressure sensitive, 30-year cycle, duct joint and general purpose rolled sealant. Butyl Backed Fabric provides an instant aggressive grip to most surfaces including sheet metal, duct board, and flex duct for indoor applications. The butyl adhesive/sealant is a 100% solids sealant, which stays flexible and does not release from the substrate.

Storage

- Temperature
- 35°F to 110°F (1.7°C to 44°C)
- DO NOT FREEZE
- Shelf Life 24 months
- 24 months Non-flammable

Options and Packaging

- U1800 Coatings- 9.75" x 9.75"- Per Piece
- U2800 Coatings- 11.75" x 11.75"- Per Piece
- U3800 Coatings- 17.5" x 11.75"- Per Piece
- U4800 Coatings- 17.5" x 17.5"- Per Piece

Application

Temperature

- Apply in dry conditions above 40° F (4° C); At temperatures below 40° F (4° C) atmospheric condensation surfaces inhibit adhesion and should be avoided.

Coating Acrylics

- Use epoxy- or water-based paint or coating.
- Use weatherized paint when applied on exterior surfaces.
- Not for use with Silicone

**Each U-Anchor Coating includes a Re-inforcement Fabric. These are replacements in the event the originals are misplaced.*

Typical Properties And Characteristics

- Backing: DuPont Sontara® polyester
- Thickness: 25-mils
- Sealant Material: Modified butyl
- Peel Strength: ≥ 10 lbs. per linear inch
- Tensile Strength: 790 psi avg.
- Elongation: 560% avg.
- Bonding Time: Immediate aggressive grip, full bond 24 hours

Custom options may be available for additional charge. Lead times may apply depending on roofing manufacturer and product availability.

Revised Version: 08.06.20