





## **INSTALLATION INSTRUCTIONS**

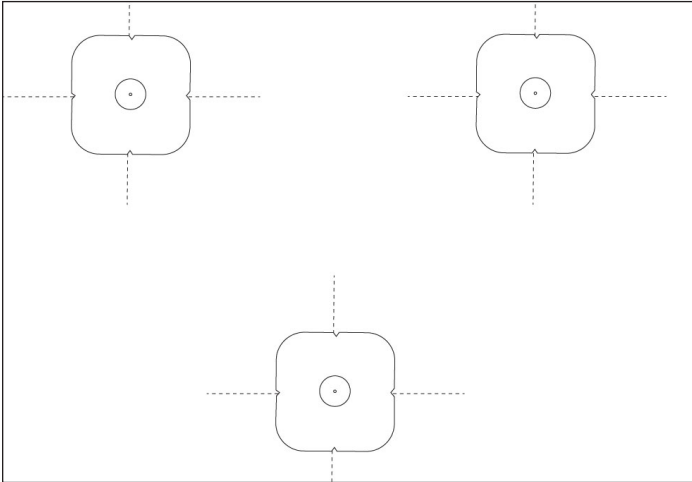


### **STEP 1**

Align a minimum of three U-Anchors as per design requirements around the perimeter of the inflatable. Allow for an approximate 30° or as per your engineering requirements.

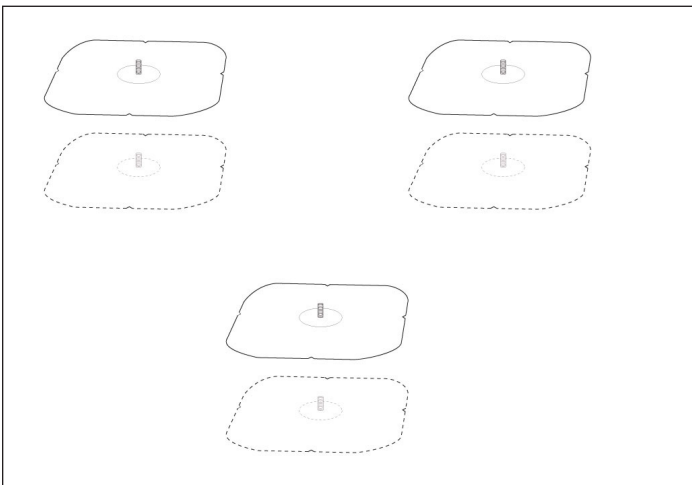

### **STEP 2**

Install the U-Anchor as per instructions provided by Anchor Products and in compliance with the roofing manufacturer requirements. Make sure to follow any applicable pre-installation and post installation requirements according to the engineered design.

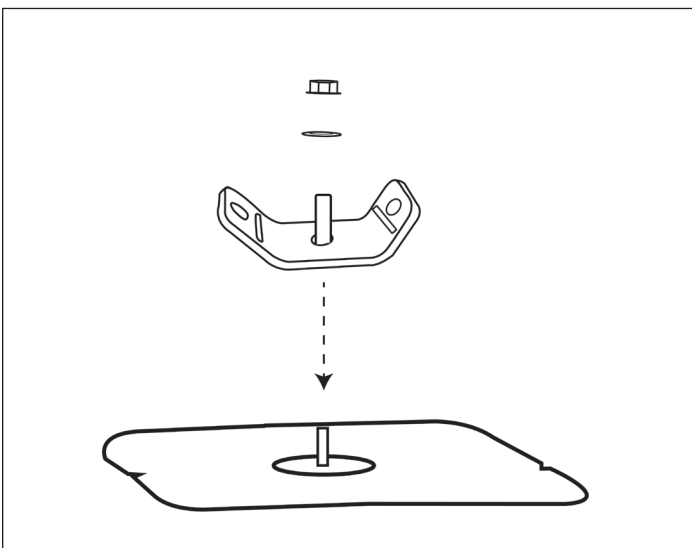

### **STEP 3**

Secure the 30/30 bracket over each of the U-Anchor bolts and fasten using the 3/8" flat washer and the 3/8"-16 flange nut. Tighten to approximately 20ft-lbs.