


HFR 0630

H-FRAME SECUREMENT



The AP Solution **HFR 0630 H-Frame** securement system provides the strength and secured mounting desired for your commercial roof. The H-Frame System is engineered to ensure member/component capacities and deflection criteria are not exceeded. It utilizes the U-Anchor™ 2000 Series Attachment. The U-Anchor can resist approximately 3000 lbs. in tension and 4000 lbs. in shear.

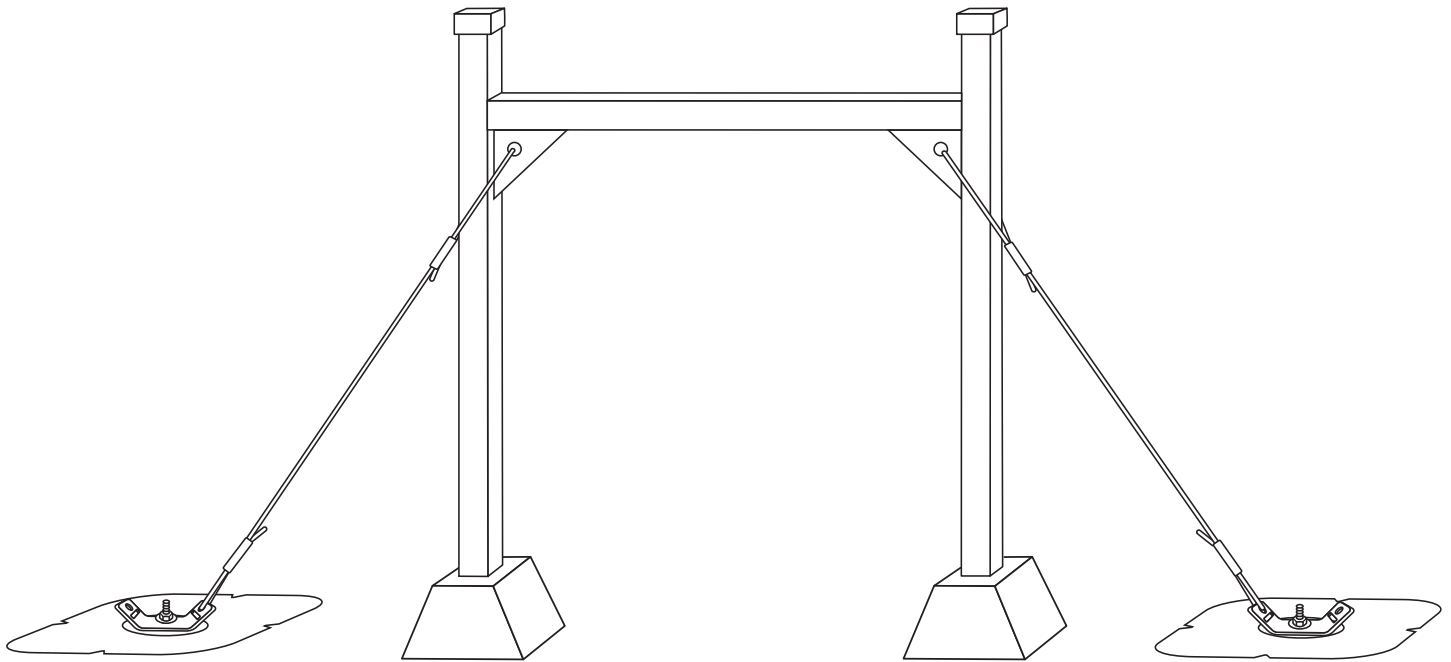

PRODUCT SPECIFICATIONS



Adjustable Strut Bracket

- Dimensions: 8" x 3" x 3.5"
- Material: Hot Dipped Galvanized Steel

Walking Surfaces

- Dimensions: As per design requirements
- Material: Hot Dipped Galvanized steel or Aluminum
- Quantity: As per design requirements

Framing Material

- Dimensions: As per design requirements
- Material: Hot Dipped Galvanized Steel or Aluminum
- Quantity: As per design requirements

Other components Included:

- 3/8"-16 Stainless Steel Flange Nut
- 3/8" Stainless Steel Flat Washer
- 3/8"-16 Stainless Spring Nut
- 3/8"-16 X 1" Stainless Steel Bolts
- U-Anchor 2000 & 3000 Series

Construction complies with current OSHA 1910 Standards.

All representations herein are premised on proper installation and use of approved components. Failure to properly install or use of unapproved components voids all Anchor Products representations.

* Specified option is standard. Custom options may be available for additional charge. Lead times may apply depending on roofing manufacturer and product availability.