

HFR 0630

H-FRAME SECUREMENT




The AP Solution **HFR 0630 H-Frame** securement system provides the necessary height with strength and secured mounting for your rooftop equipment.

The H-Frame System is engineered to ensure member/component capacities and deflection criteria are not exceeded. It utilizes the U-Anchor 2000 Series Attachment.

The U-Anchor can resist approximately 3000 lbs. in tension and 4000 lbs. in shear. This attachment makes the system able to withstand strong winds and other natural events.

Respected third party engineers have tested and approved the H-Frame System. The U-Anchor attachment is accepted by all major North American roofing manufacturers.

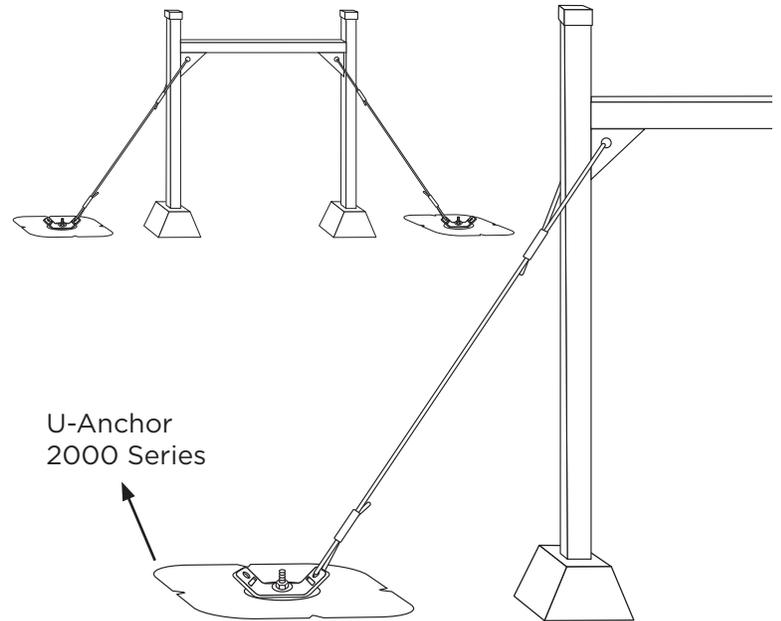

HVAC SYSTEMS SECUREMENT

ASCE 7-16 code requires all rooftop equipment to be bolted, welded, or otherwise positively fastened without consideration of frictional resistance.



FEATURES:

- » **H-Frame Securement System** designed for support and securement.
- » **U-Anchor** provides you with a stable securement that can withstand high winds, seismic conditions and other natural hazards.
- » Attaches safely to TPO, PVC, EPDM, asphalt and coated roofs without damaging the roof with the U-Anchor.
- » All exposed components and hardware are stainless steel, aluminum, or other non-corrosive materials.
- » H-Frame struts are made of aluminum or hot dipped galvanized steel.

ADVANTAGES

- » System built to withstand environmental hazards.
- » Accepted by all major North American roofing manufacturers.
- » Allows for heavier systems critical equipment to be supported and secured.

Contact **Anchor Products Technical Services** for assistance with your custom mounting solution.

WARNING! The products included/described herein are protected by patents that are exclusively licensed to Anchor Products (visit www.anchorp.com/patents for details). Any use of Anchor's products for anything other than their expressed intended purpose or installation other than according to the written instructions provided by Anchor Products shall void all warranties, representations and promises related to the products and Anchor Products disclaims any and all liability associated with the products in such an event. If you have any questions about the proper use or installation of the products, please contact Anchor Products at 888-575-2131.