


# CMK 0500

## SATELLITE SECUREMENT



The AP Solution **CMK 0500 Satellite** securement provides you with a stable and secure option for your system that meets ASCE-7 regulations for your commercial roof. This solution provides a secured base with the help of the U-Anchor. The satellite system stands firm against seismic events and high winds, utilizing the strength provided by the U-Anchor.

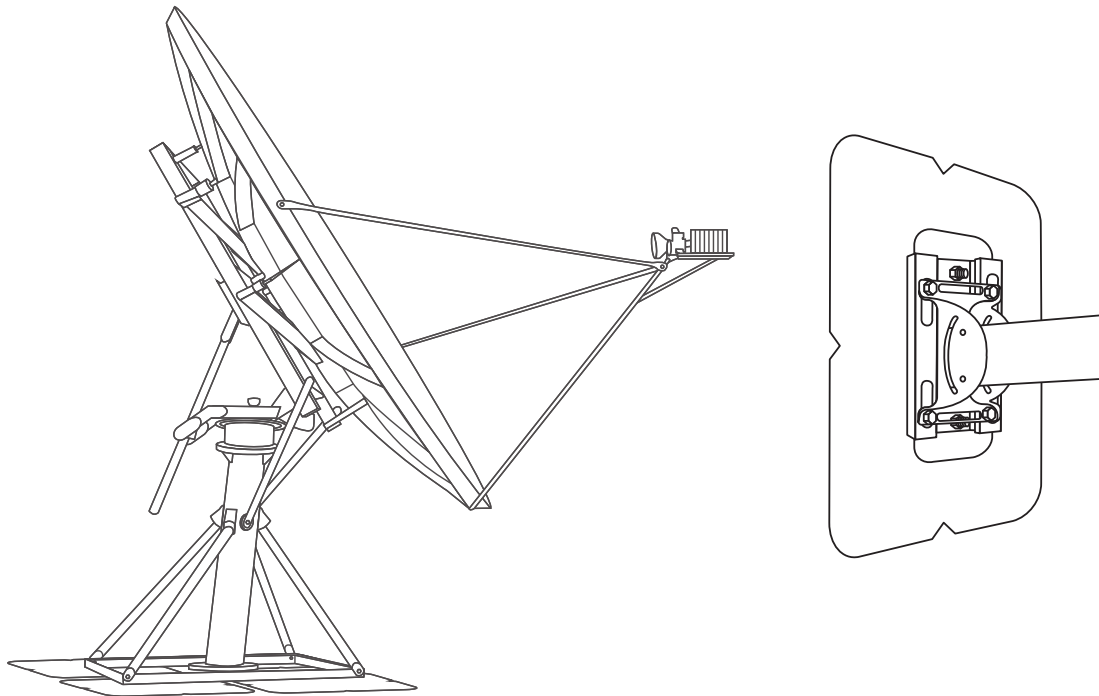

### PRODUCT SPECIFICATIONS



#### **Satellite Bracket**

- Dimensions: 8" x 2-1/2" x ??
- Material: Powder Coated Galvanized steel

#### **Components**

- 5/8"-16 Stainless Steel Strut Nut
- 3/8"-16 x 3/4" Stainless Steel Bolts
- 3/8" Stainless Steel Flat Washers
- 3/8"-16 Stainless Steel Flange Nuts

Efficient usage of space and versatile placement options.

U-Anchors matches all commercial roofing materials and brands.

U-Anchor Safely attaches to EPDM, TPO, PVC, asphalt and coated roofs without damaging roof surfaces.

Each U-Anchor 2000 Series Attachment can resist approximately 3000 lbs. in tension and 4000 lbs. in shear.

Satellite Bracket Made of 1/8" Galvanized steel.

All representations herein are premised on proper installation and use of approved components. Failure to properly install or use of unapproved components voids all Anchor Products representations.

\* Specified option is standard. Custom options may be available for additional charge. Lead times may apply depending on roofing manufacturer and product availability.