


ESS 0670

EXHAUST SECUREMENT



The AP Solution **ESS 0670 Exhaust** and or ventilation securement solution facilitates your need for a securely mounted system and follows the unique requirements specified by your local building code and standards. The exhaust system securement is attached using our U-Anchor™ 2000 Series attachments, providing exceptional strength.

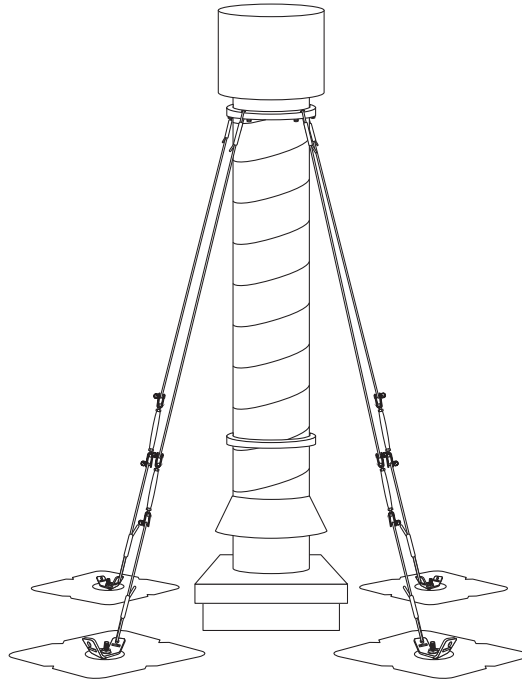

PRODUCT SPECIFICATIONS



Guy Wire Kit

- Material: Stainless Steel 3/16" 7 X19 Wire Rope
- Dimensions: 3/16" X 10' - Custom lengths available)
- Quantity: As Per Project Requirements (Min. 3)

Components Included in Kit

- 30/30 Bracket
Material Type: Stainless steel
- Turn Buckle
Material Type: Stainless steel
- (2) Wire Rope Clips
Material Type: Stainless steel

Each U-Anchor 2000 Series can resist approximately 3000 lbs. in tension and 4000 lbs. in shear.

System attaches safely to TPO, PVC, EPDM, asphalt and coated roofs without damaging the roof surface.

U-Anchor is allowed and accepted by all major North American roofing manufacturers maintaining all roof warranties.

Exposed components made of stainless steel and will not corrode on the roof.

Cables come standard at 10', but are available in custom lengths up to 100'.

All representations herein are premised on proper installation and use of approved components. Failure to properly install or use of unapproved components voids all Anchor Products representations.

* Specified option is standard. Custom options may be available for additional charge. Lead times may apply depending on roofing manufacturer and product availability.